




EOC Belgium

HIGH PERFORMANCE POLYURETHANE DISPERSIONS

PRODUCT DESCRIPTION

EOC's range of polyurethane binders can be used as components in finishing formulations for leather. They will allow the finisher to produce different types of leather with characteristics that will satisfy ever changing market requirements.

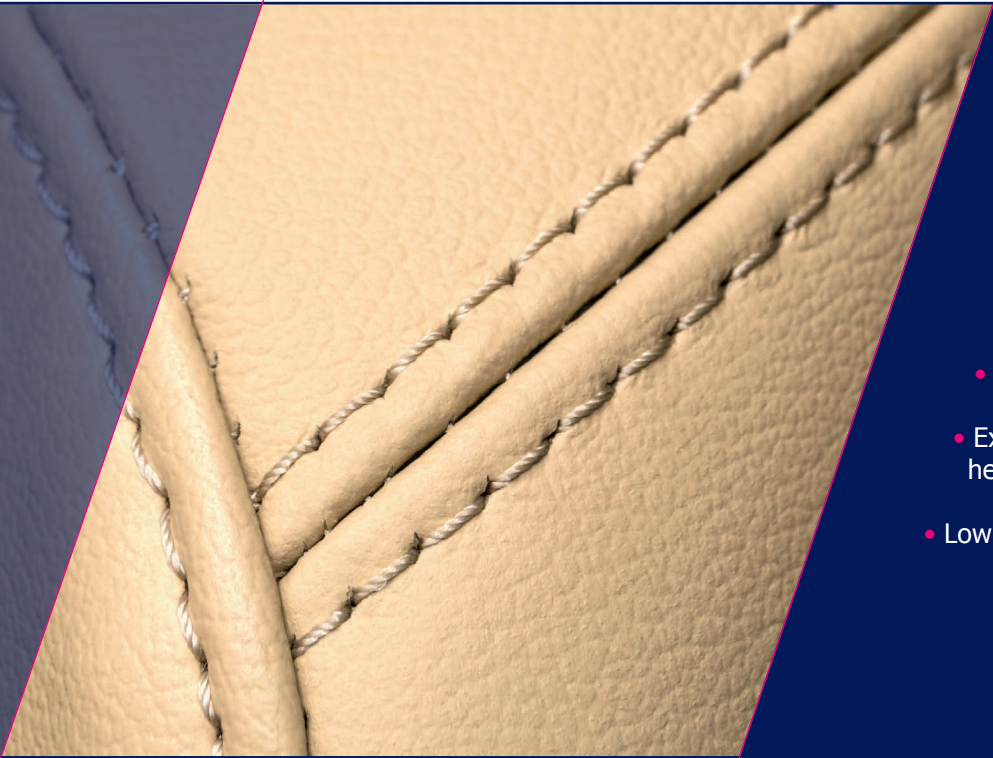

- Hydrolysis resistant
- NMP and NEP free
- Good embossing properties
- Excellent light fastness and heat resistance
- Low VOC

HIGH PERFORMANCE POLYURETHANE DISPERSIONS

PRODUCT	PROPERTIES				MAIN USE
	Solids (%)	Elongation	pH	Viscosity (mPas@23°C)	
EP 3800	30	450%	7.5 - 9.5	< 500	cobinder in basecoats
EP 3801	30	390%	7.5 - 9.5	< 500	topcoat / stucco
EP 3802	30	750%	7.5 - 9.5	< 500	topcoat



EOC Belgium nv

p/a IP De Bruwaan 12
B-9700 Oudenaarde

T +32 55 23 58 58
F +32 55 23 58 59

info@eocgroup.com
www.eocgroup.com

All recommendations for the use of our products, whether given by us in writing, orally, or to be implied from data or test results obtained by us, are based on the current state of our knowledge at the time such recommendations are made. When additional information is obtained, these recommendations may be updated. They may also be influenced by circumstances outside our control. Notwithstanding such recommendations, the user is responsible to determine that the product as supplied by us, is suitable for the process or purpose he intends to use it. The user of the product is solely responsible for compliance with all laws and regulation applying to the use of the product. Since we cannot control the application, use or processing of the products, we do not accept responsibility therefore. The user shall ensure that the intended use of the products will not infringe in any party's intellectual property rights.